


Replacing LCM4 Controller Battery

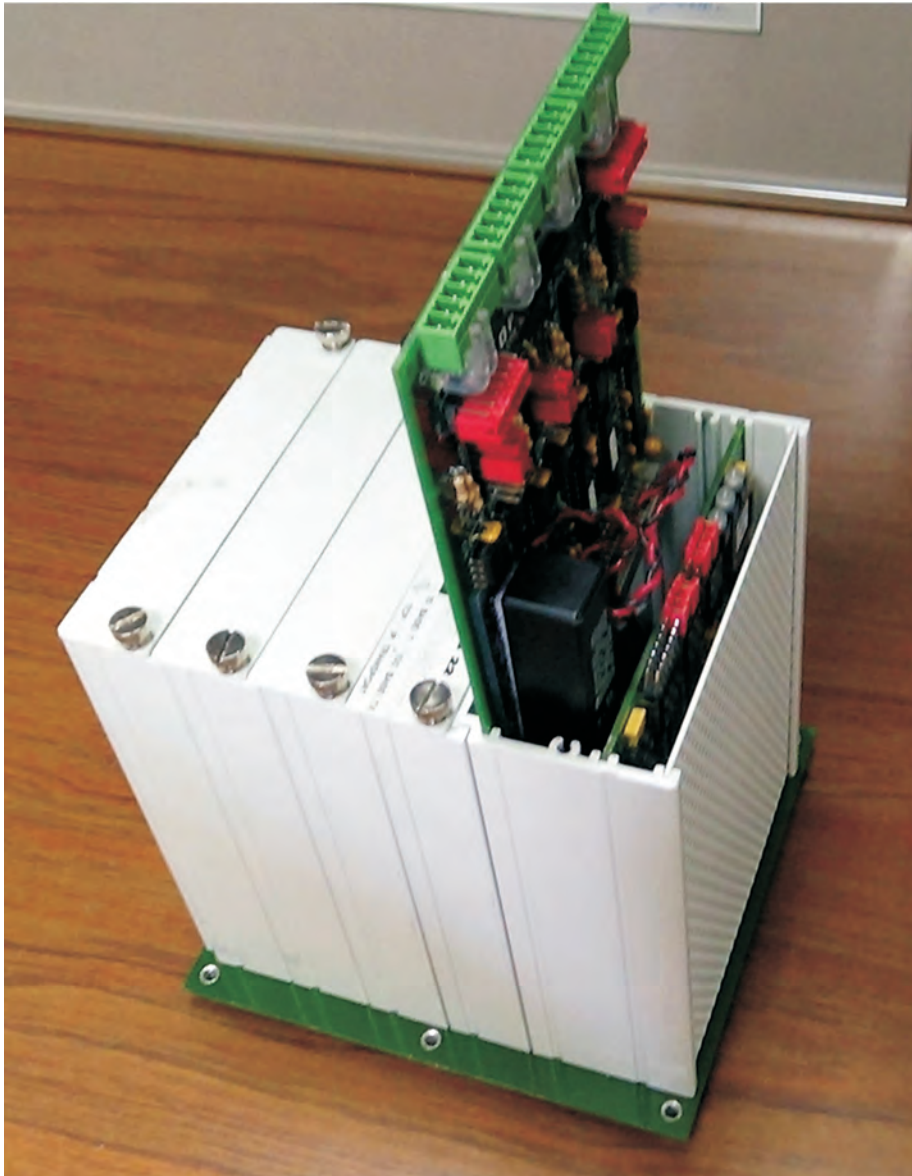

1. Remove 2 screws from 2nd cover plate.
2. Gently pull card out.
3. 5-yr Lithium Battery
Plugs into this card.
4. Remove existing battery from
velcro strip and unplug.
5. Plug in new battery
and press new battery
against velcro strip.
6. Slide card in grooves
into place. Press gently to
engage socket.
7. Replace to plate and
2 screws.

TADIRAN

WARNING: FIRE, EXPLOSION
AND SEVERE BURN HAZARD.
DO NOT RECHARGE DISASSEMBLE,
HEAT ABOVE 100°C, INCINERATE
OR EXPOSE CONTENTS TO WATER.

JUL-07

OPTO-22
LCM4 SERIAL

9161a

6216